
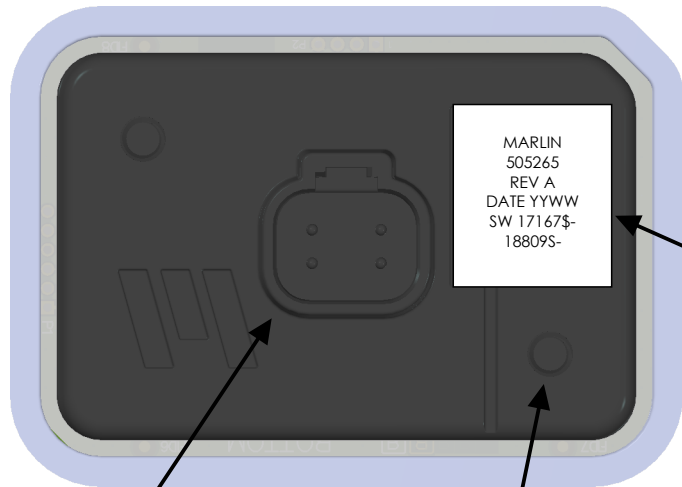
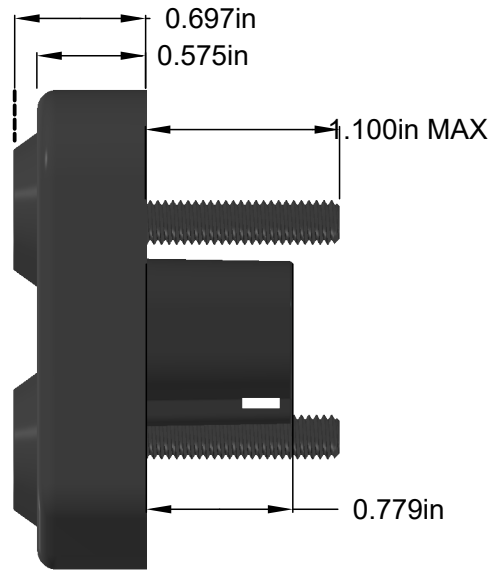


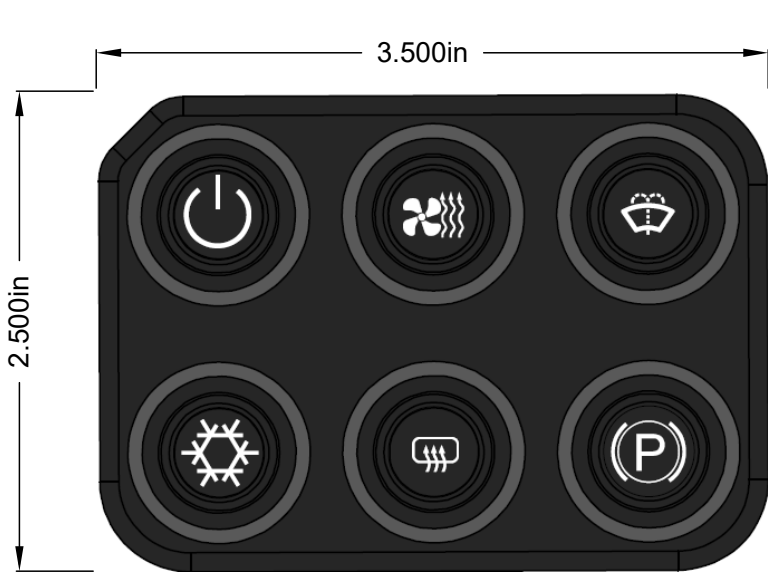


J1
MATES WITH
DEUTSCH DT06-4S
*OR EQUIVALENT


M6 x 0.450 STUD (2PLCS)
MAX. TORQUE = 35 IN LBS.

MARLIN
505265
REV A
DATE YYWW
SW 17167\$-
18809S-

REVISIONS				
REV	DATE	ECN	DESCRIPTION	APVD
A	08/26/25	18803E	RELEASE TO PRODUCTION	JC

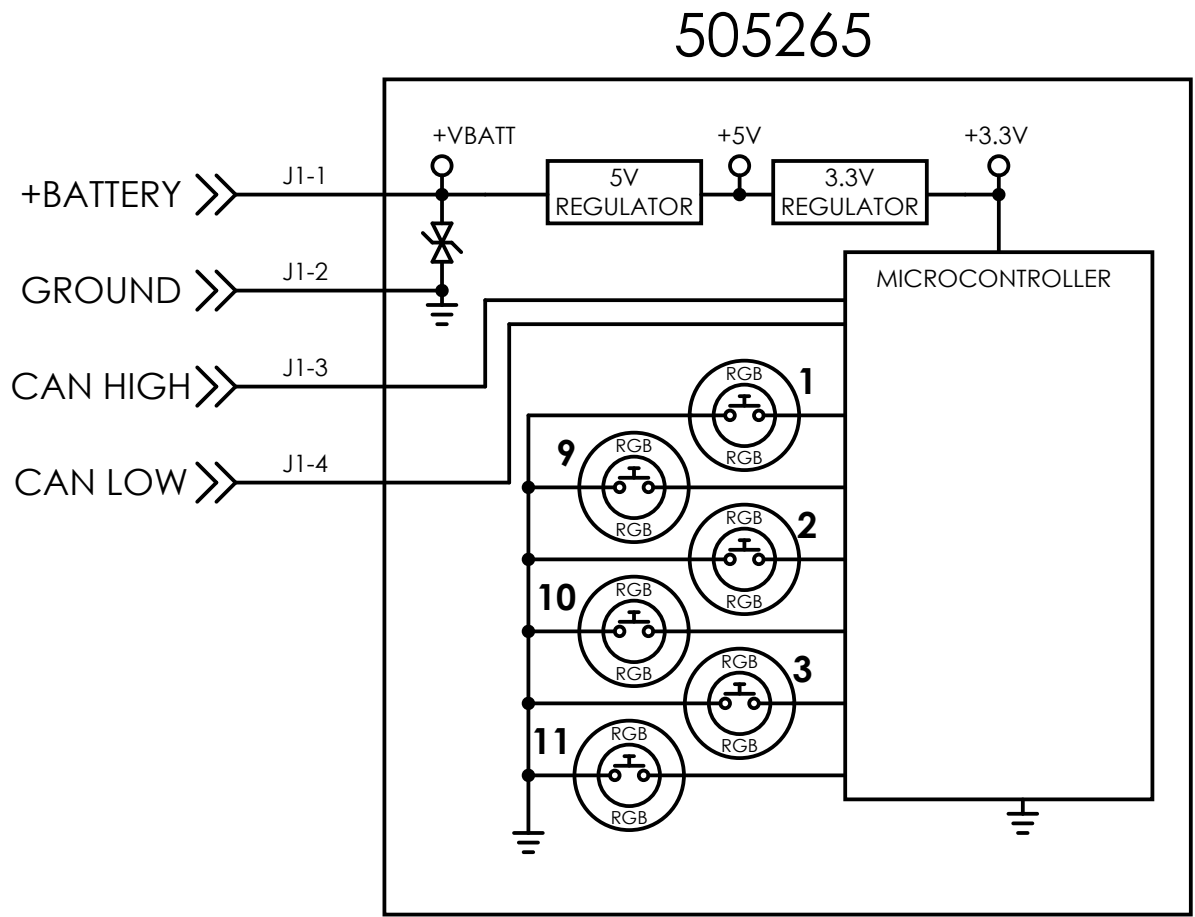

- NOTES:
1. OPERATING VOLTAGE: +9VDC TO +36VDC (+12VDC OR +24VDC NOMINAL).
 2. REFERENCE CAN COMMUNICATION SPEC: 014413S-
 3. REFERENCE XML CONFIGURATION SPEC: 018809S-
 4. HANDLING PRECAUTION: DO NOT FLEX OR TWIST

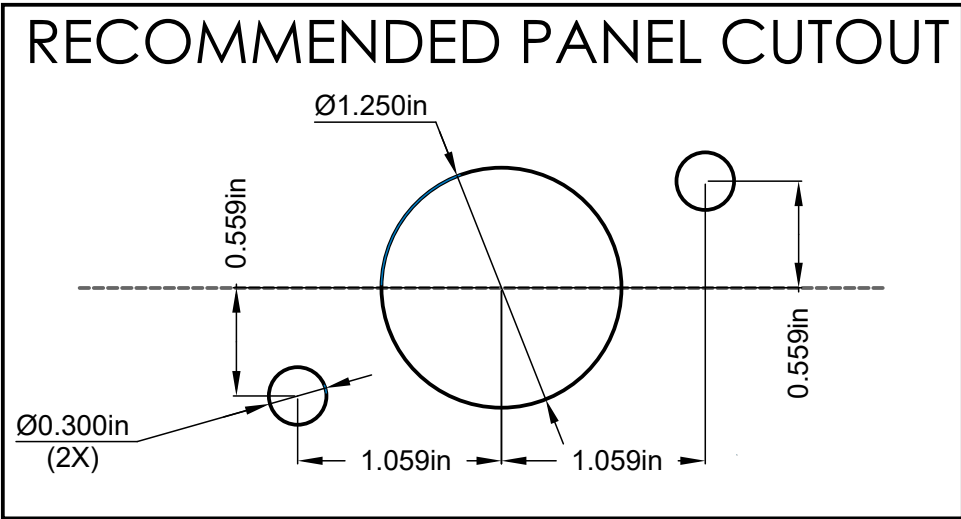

CHECKED BY: J. COOPER	DATE: 10/01/25	DRAWN BY: N. HIDDE		DATE: 08/26/25	SHEET 1 OF 1
APPROVED BY: J. COOPER	DATE: 10/15/25	SIZE: B	DRAWING NUMBER: 018805	TYPE: O	REVISION: A



TITLE: **OUTLINE, 505265
6PB LEGEND KEYPAD**

SIZE: B	DRAWING NUMBER: 018805	TYPE: O	REVISION: A
----------------	-------------------------------	----------------	--------------------