


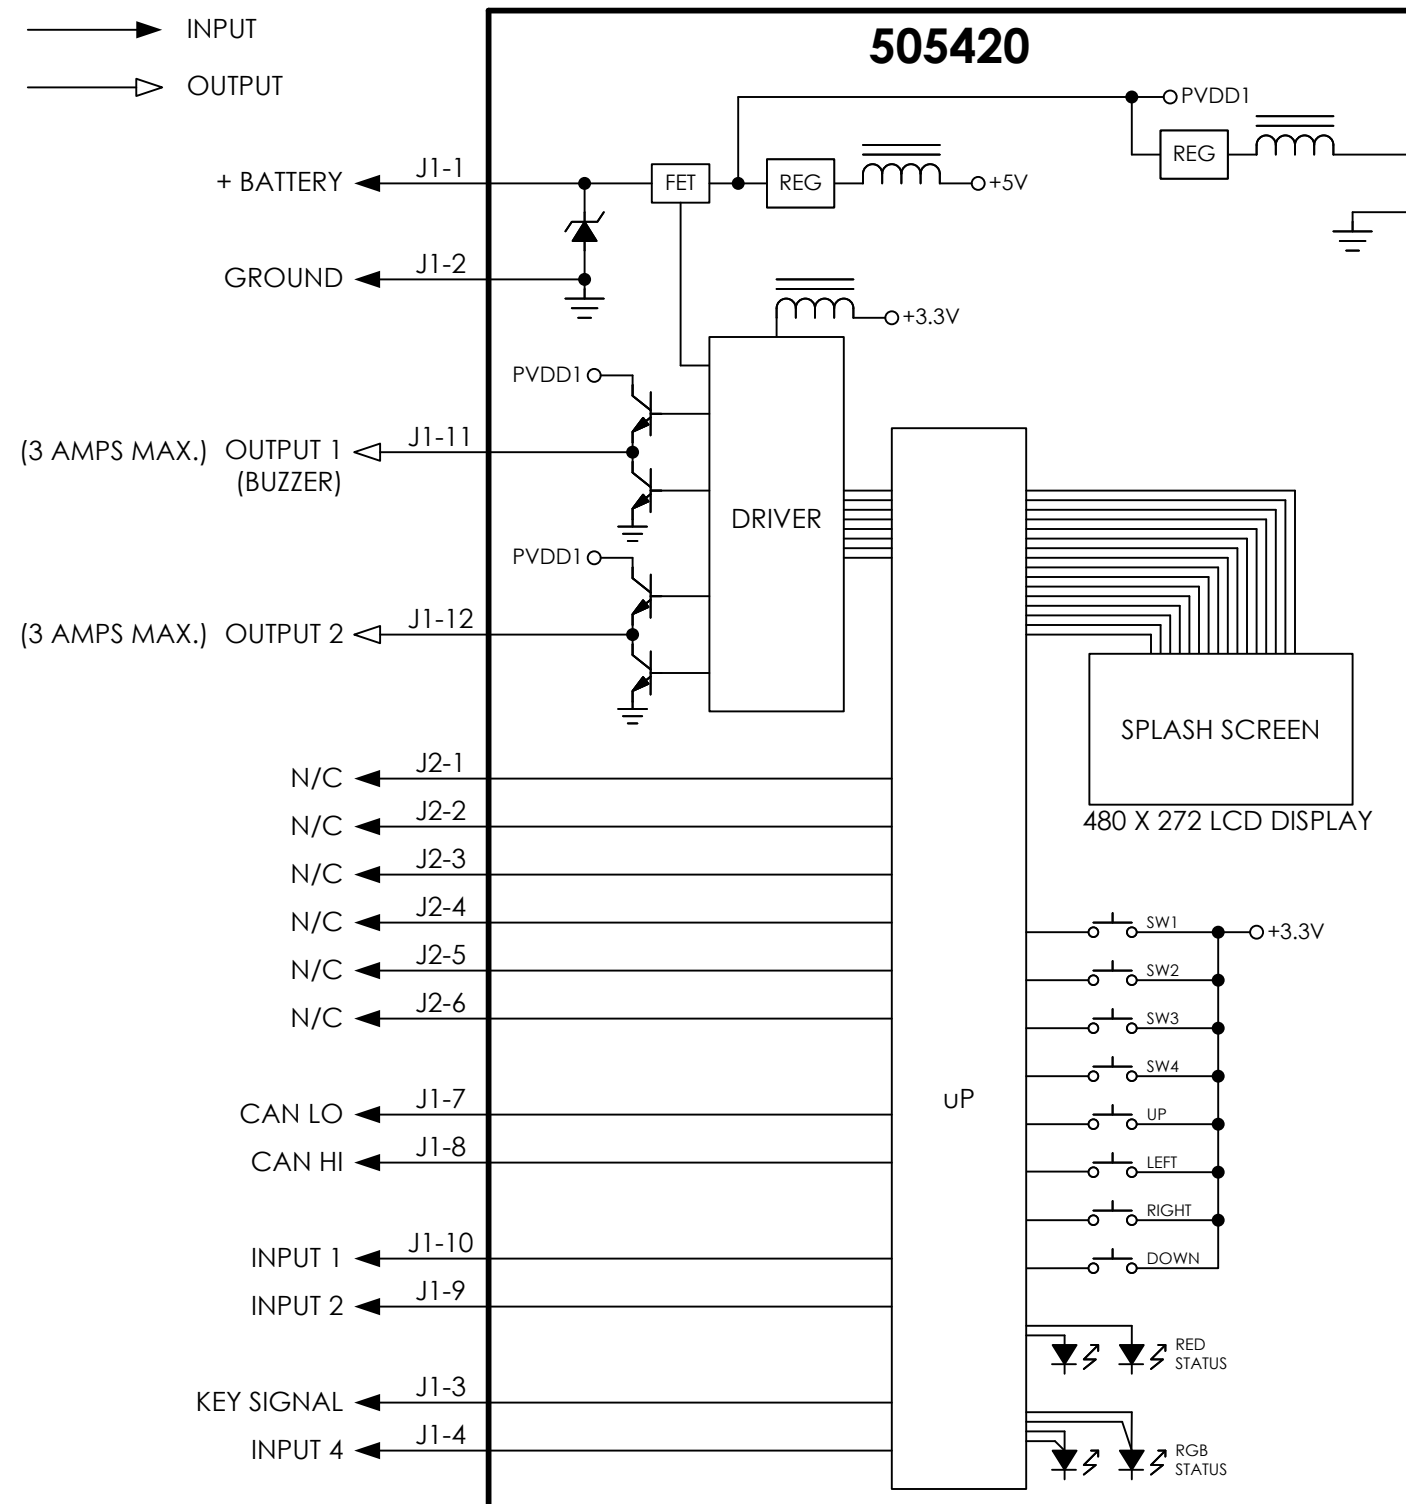


OPERATING VOLTAGE: 9-36 VDC (12VDC OR 24VDC NOMINAL)
CANBUS PROTOCOL: SAE J1939/ISO 11783, 250KB/S
505420 SOURCE ADDRESS: 0x28
TERMINATION: NONE

- NOTES:
1. ROHS COMPLIANT
 2. WEEE DIRECTIVE; TEXTRON RESPONSIBLE FOR COLLECTION AND RECYCLING AT THE END OF LIFE.

THE INFORMATION CONTAINED ON THIS
DRAWING IS PROPRIETARY AND CONFIDENTIAL
TO MARLIN TECHNOLOGIES INC. UNAUTHORIZED
USE OR DISTRIBUTION WITHOUT CONSENT IS
PROHIBITED.

REVISIONS				
REV	DATE	ECN	DESCRIPTION	APVD
A	06/06/24	17930E	RELEASE TO PRODUCTION	JC

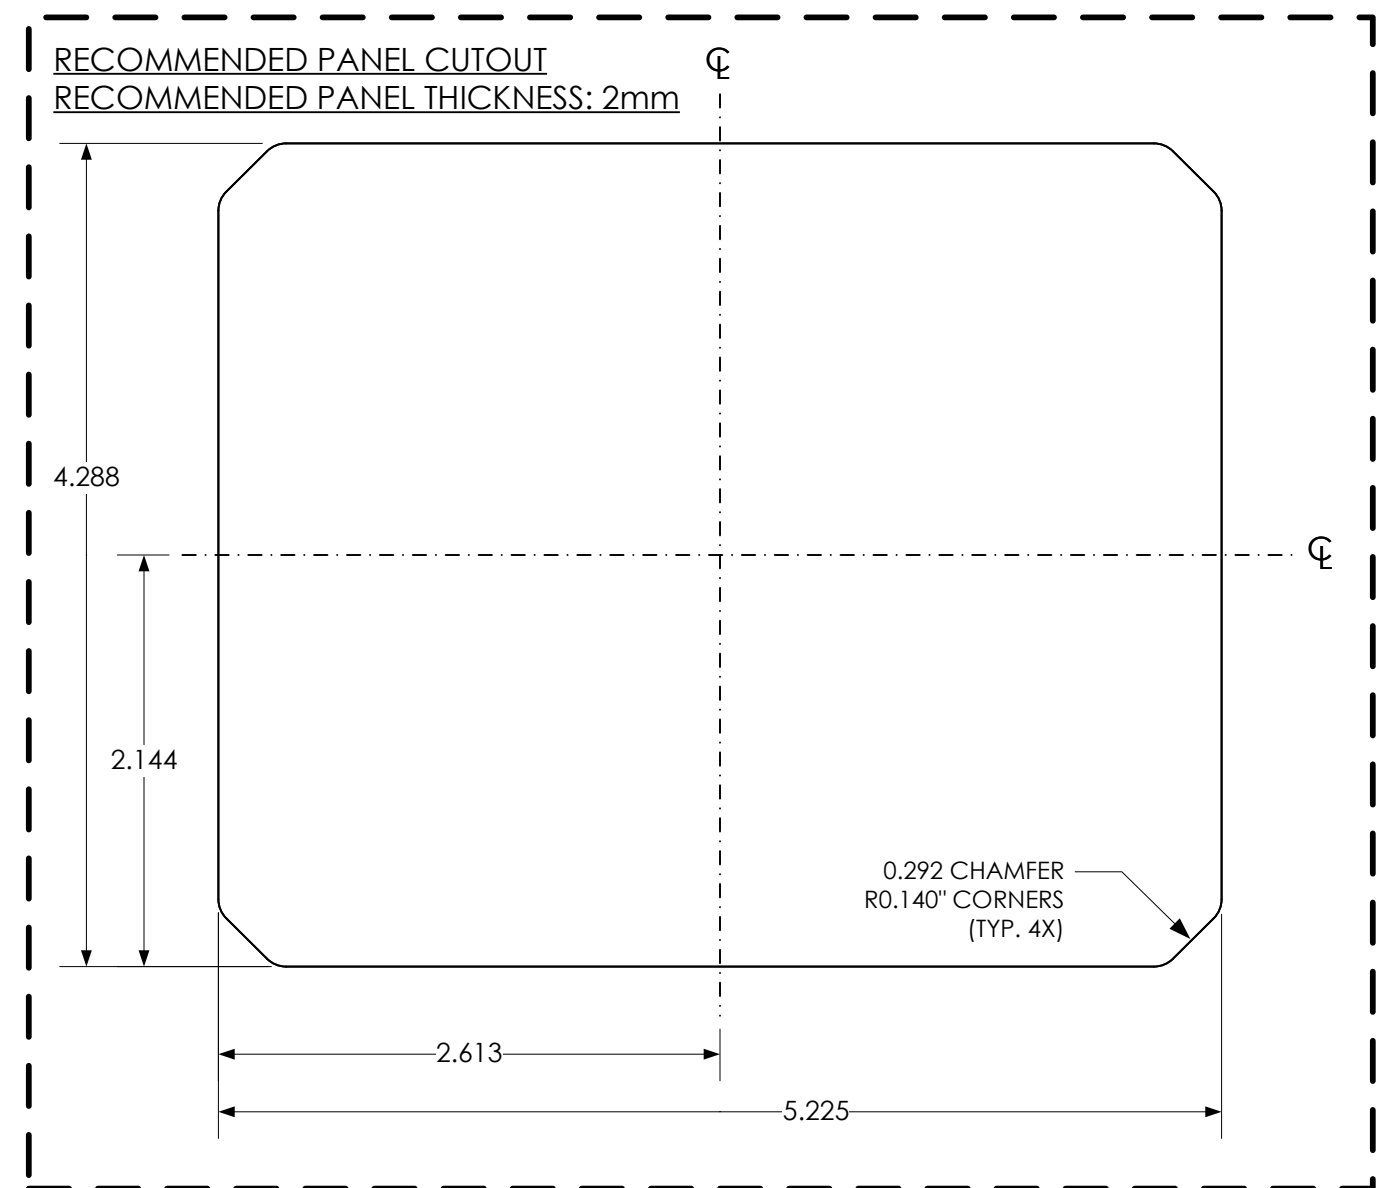

UNLESS OTHERWISE SPECIFIED, DIMENSIONS
ARE IN INCHES AND TOLERANCES ARE

TWO PLACE DECIMAL +/- 0.05	THREE PLACE DECIMAL +/- 0.020	ANGLES +/- 0.5°
----------------------------------	-------------------------------------	--------------------




DO NOT SCALE DRAWING

CHECKED	J.COOPER	DATE 8/9/24
APPROVED	J.COOPER	DATE 8/9/24

MARLIN TECHNOLOGIES INC.


TITLE	OUTLINE, 505420
	4.3" COLOR DISPLAY LOW POWER/EMC

SIZE B	DRAWING NUMBER 017932	TYPE ○	REV A
DRAWN N.HIDDE	DATE 06/06/24	SHEET 1 OF 2	

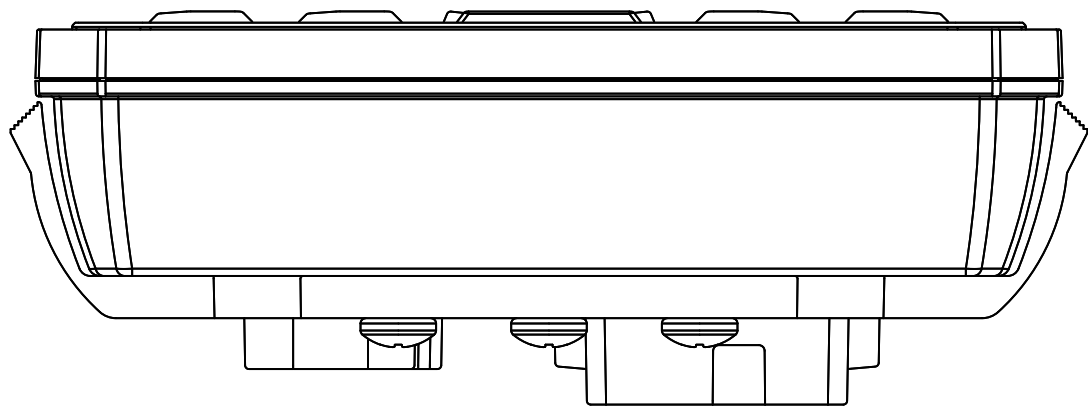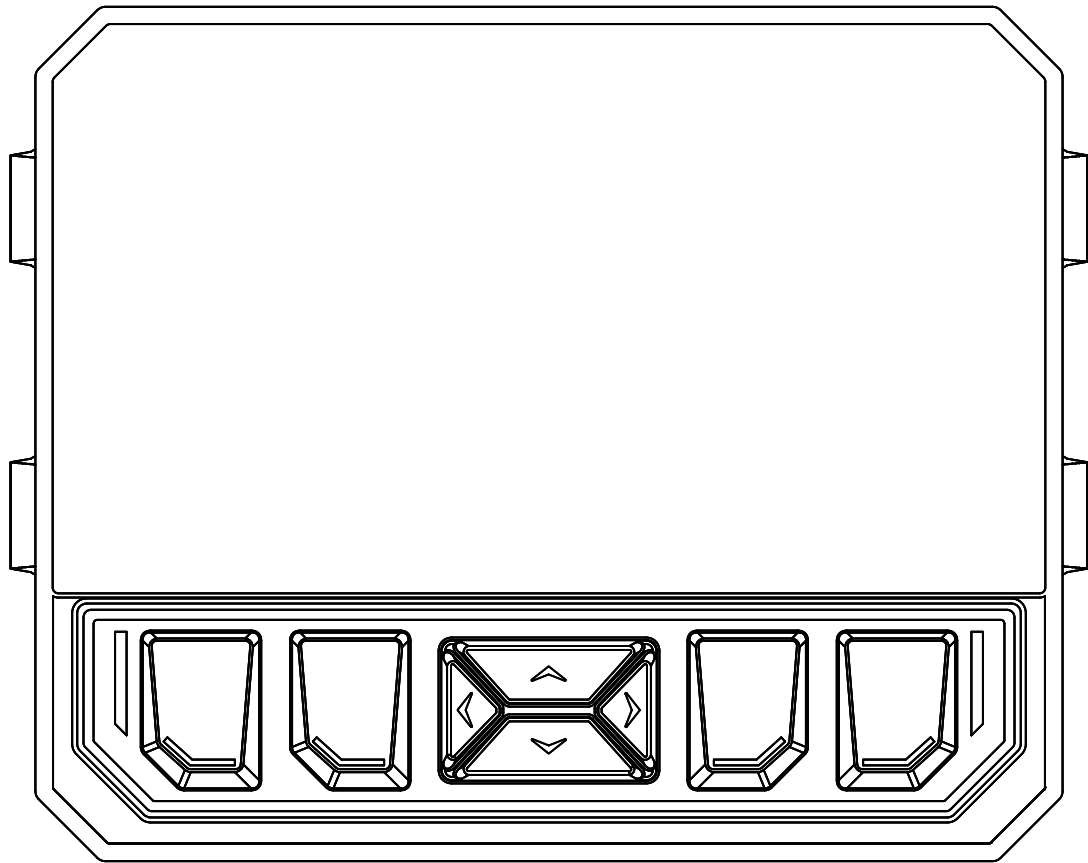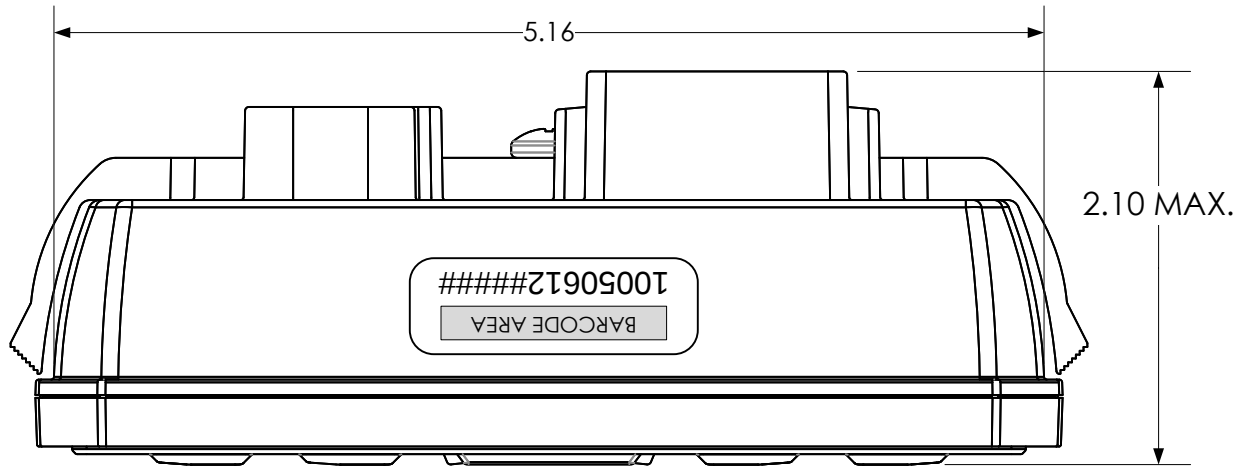


CUSTOMER
CUST PN
MTI 505420
REV A
DATE YYWW
SOFTWARE
17935\$-
Rohs Compliant

PRODUCT LABEL
REV=BOM REVISION
LABEL DATE CODE:
YY=YEAR OF MANUFACTURE
WW=WEEK OF MANUFACTURE

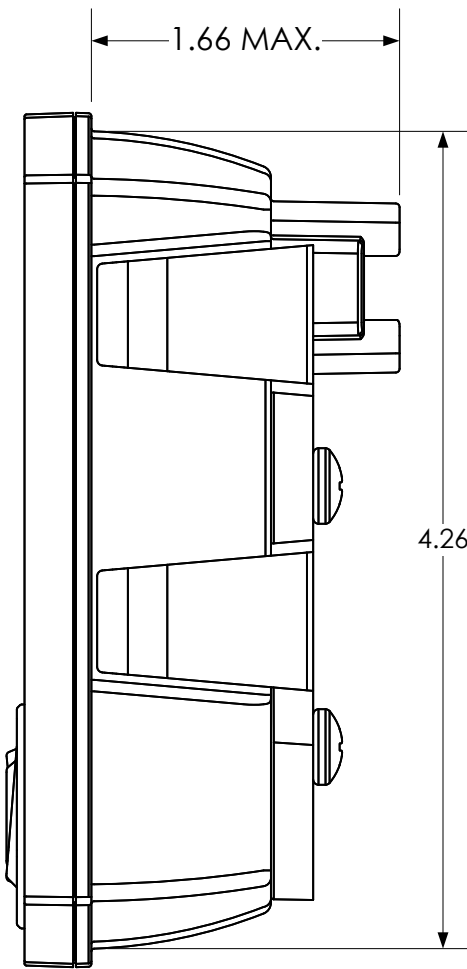

REVISIONS				
REV	DATE	ECN	DESCRIPTION	APVD
A	06/06/24	17930E	RELEASE TO PRODUCTION	JC

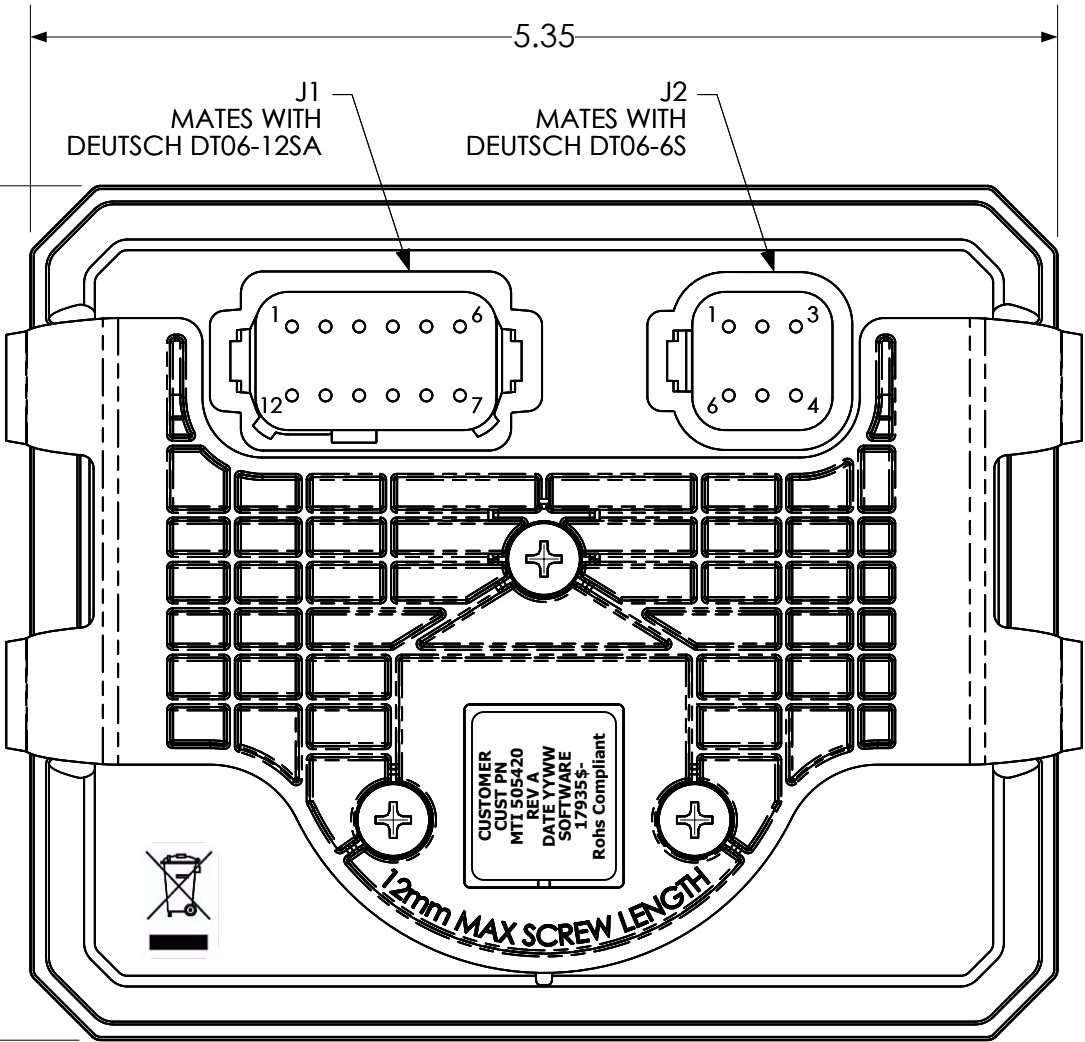

THE INFORMATION CONTAINED ON THIS
DRAWING IS PROPRIETARY AND CONFIDENTIAL
TO MARLIN TECHNOLOGIES INC. UNAUTHORIZED
USE OR DISTRIBUTION WITHOUT CONSENT IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE TWO PLACE DECIMAL +/- 0.05 THREE PLACE DECIMAL +/- 0.020 ANGLES +/- 0.5°			MARLIN TECHNOLOGIES INC.			
			TITLE OUTLINE, 505420			
			4.3" COLOR DISPLAY LOW POWER/EMC			
			SIZE B	DRAWING NUMBER 017932		TYPE O
DO NOT SCALE DRAWING			DRAWN N.HIDDE		DATE 06/06/24	SHEET 2 OF 2
CHECKED	J.COOPER	DATE 8/9/24				
APPROVED	J.COOPER	DATE 8/9/24				