
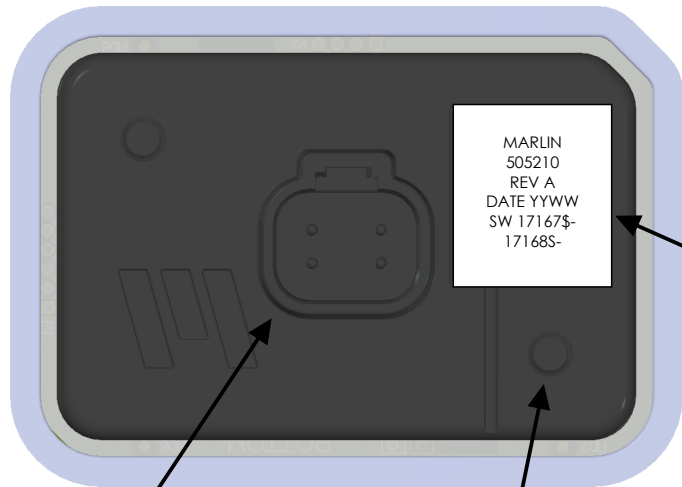
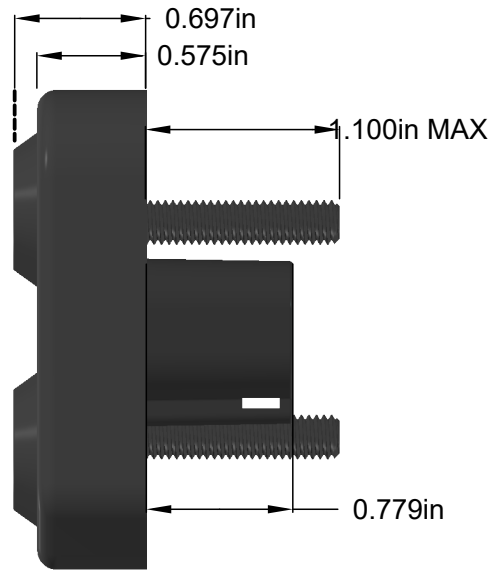


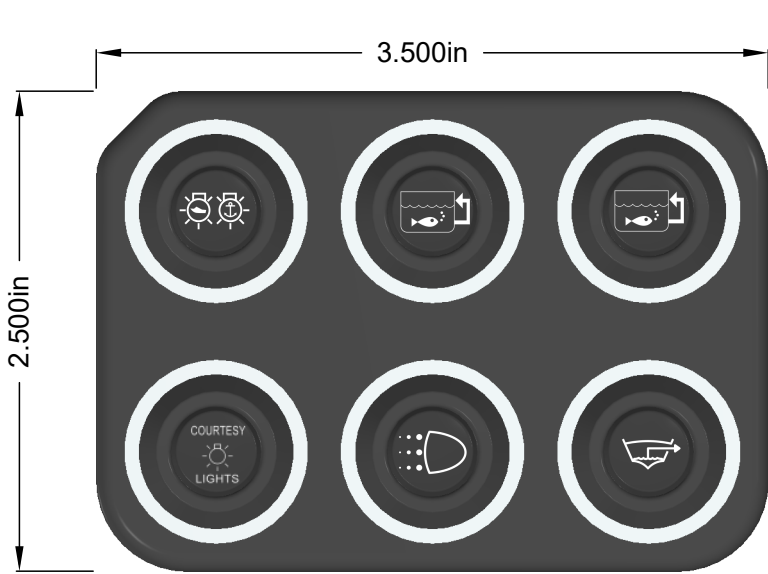


J1
MATES WITH
DEUTSCH DT06-4S
*OR EQUIVALENT


M6 x 0.450 STUD (2PLCS)
MAX. TORQUE = 35 IN LBS.

MARLIN
505210
REV A
DATE YYWW
SW 17167\$-
17168S-

REVISIONS				
REV	DATE	ECN	DESCRIPTION	APVD
A	10/04/21	17159E	RELEASE TO PRODUCTION	JC

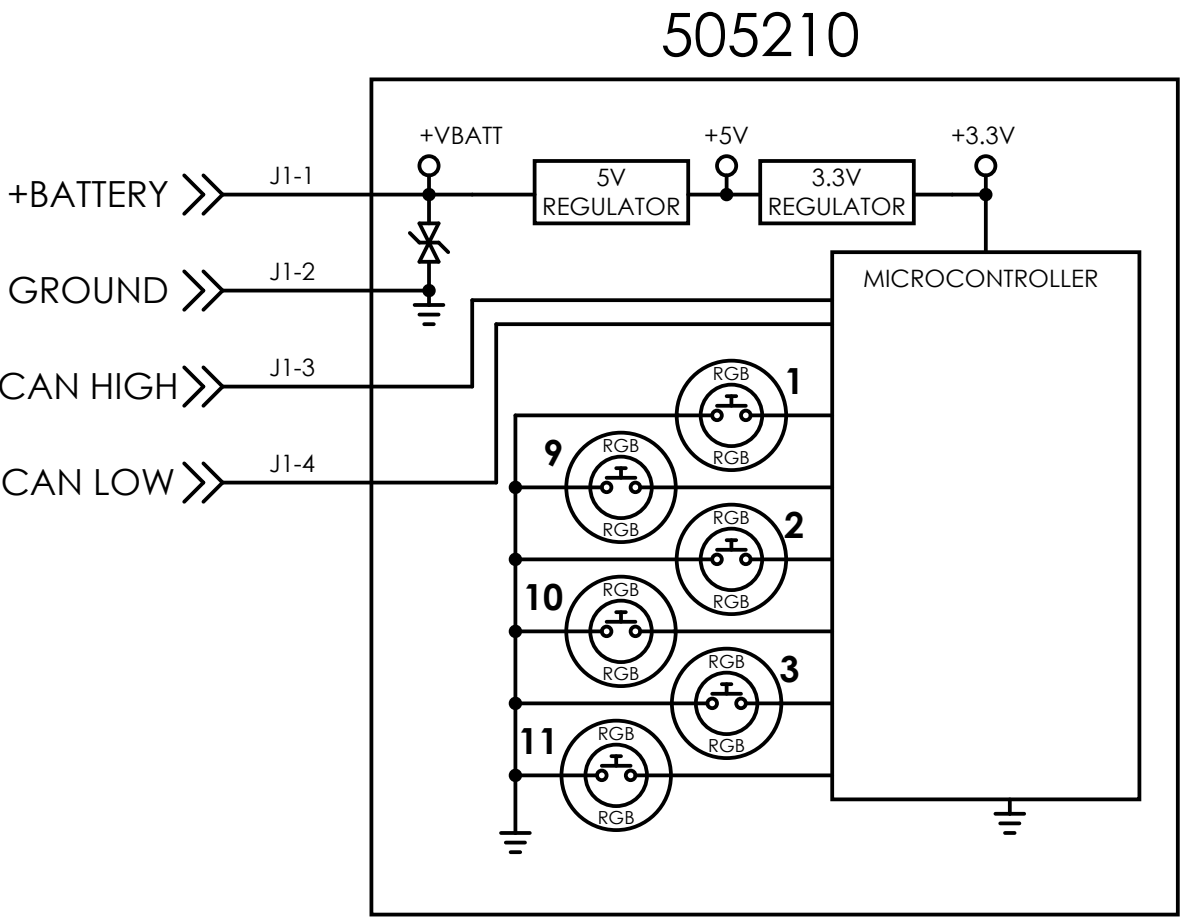

- NOTES:
1. OPERATING VOLTAGE: +9VDC TO +36VDC (+12VDC OR +24VDC NOMINAL).
 2. REFERENCE CAN COMMUNICATION SPEC: 014413S-
 3. REFERENCE XML CONFIGURATION SPEC: 017168S-
 4. HANDLING PRECAUTION: DO NOT FLEX OR TWIST

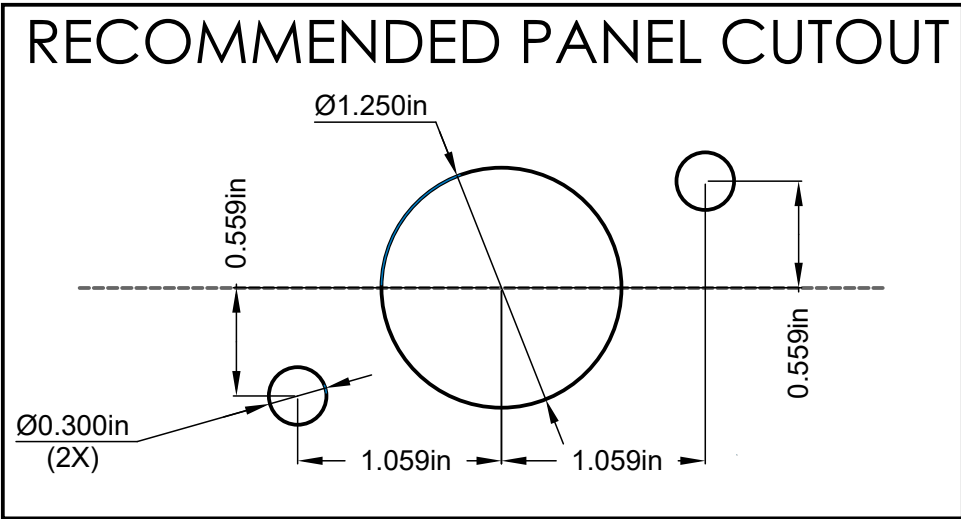

CHECKED BY: J. COOPER	DATE: 12/15/23	DRAWN BY: E. FIERST		DATE: 10/26/2023	SHEET 1 OF 1
APPROVED BY: J. COOPER	DATE: 12/15/23	SIZE: B	DRAWING NUMBER: 017161	TYPE: O	REVISION: A

TITLE: OUTLINE, 505210
6PB LEGEND KEYPAD

SIZE: B	DRAWING NUMBER: 017161	TYPE: O	REVISION: A
---------	------------------------	---------	-------------