


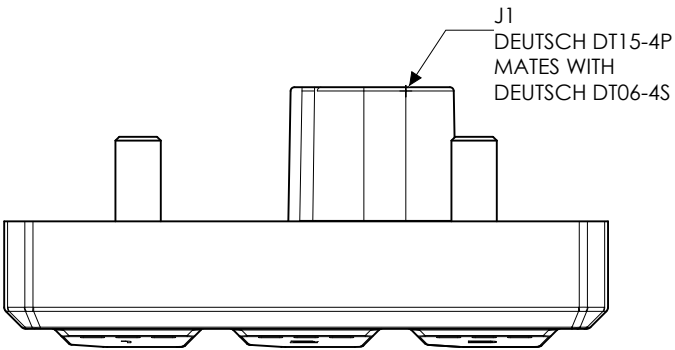
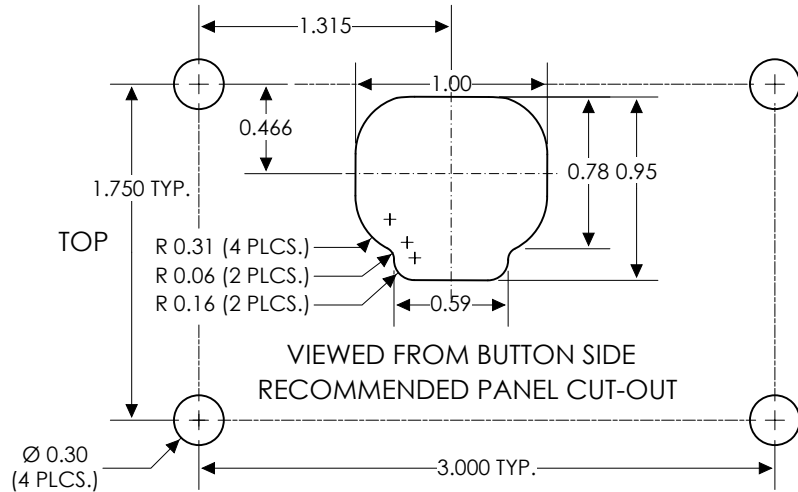


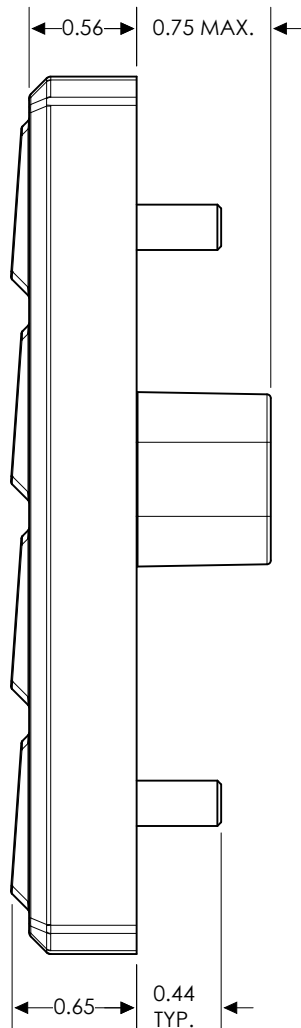

J1  
DEUTSCH DT15-4P  
MATES WITH  
DEUTSCH DT06-4S

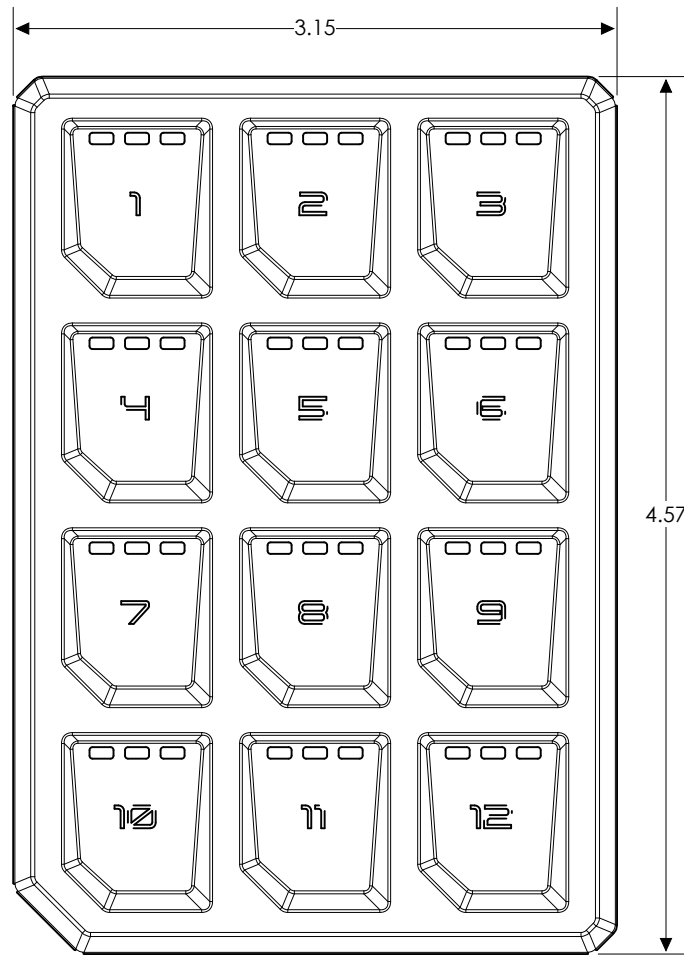

VIEWS FROM BUTTON SIDE  
RECOMMENDED PANEL CUT-OUT

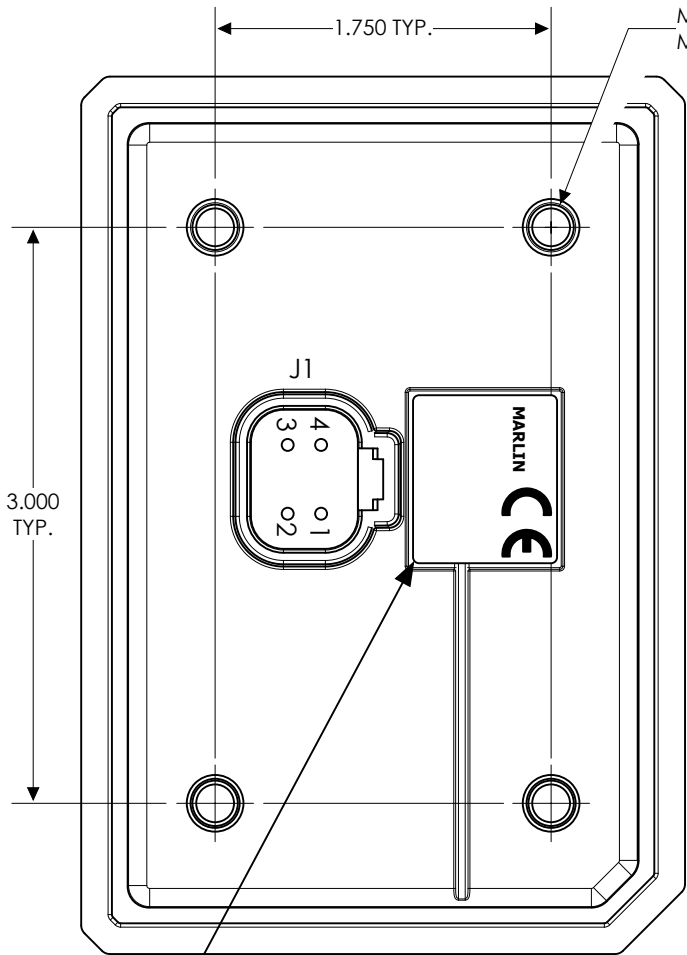

M6 x 0.450 STUD (4 PLCS.)  
MAX. TORQUE = 35 IN LBS.




PRODUCT LABEL  
REV=BOM REVISION  
LABEL DATE CODE:  
YY=YEAR OF MANUFACTURE  
WW=WEEK OF MANUFACTURE

THE INFORMATION CONTAINED ON THIS DRAWING  
IS PROPRIETARY AND CONFIDENTIAL TO MARLIN  
TECHNOLOGIES INC. UNAUTHORIZED USE OR  
DISTRIBUTION WITHOUT CONSENT IS PROHIBITED.

## REVISIONS

| REV | DATE     | ECN    | DESCRIPTION                                                        | APVD |
|-----|----------|--------|--------------------------------------------------------------------|------|
| B   | 5/27/21  | 13716E | PRODUCT LABEL REV B WAS REV A<br>UPDATED RECOMMENDED PANEL CUT-OUT | SMJ  |
| C   | 10/12/21 | 13852E | UPDATED PROD LBL WITH CE MARK                                      | SMJ  |

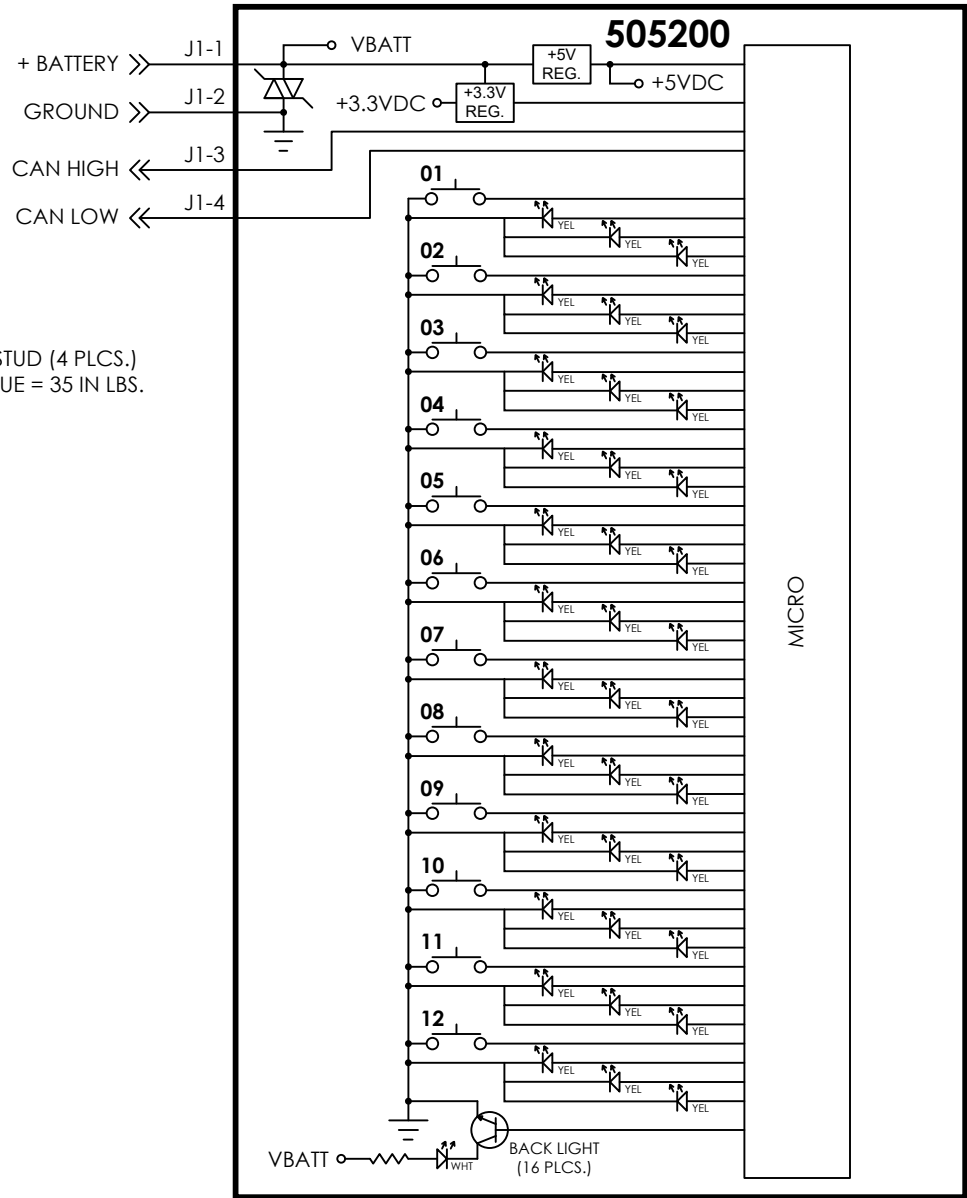

- NOTES:
1. OPERATING VOLTAGE: +9VDC TO +36VDC (+12VDC OR 24VDC NOMINAL).
  2. REFERENCE CAN COMMUNICATION SPECIFICATION: 11713S-
  3. HANDLING PRECAUTION: DO NOT FLEX OR TWIST ASSEMBLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS  
ARE IN INCHES AND TOLERANCES ARE

| TWO PLACE<br>DECIMAL<br>+/- 0.05 | THREE PLACE<br>DECIMAL<br>+/- 0.020 | ANGLES<br>+/- |
|----------------------------------|-------------------------------------|---------------|
|----------------------------------|-------------------------------------|---------------|

DO NOT SCALE DRAWING

|          |            |               |
|----------|------------|---------------|
| CHECKED  | S. JOHNSON | DATE 07/17/18 |
| APPROVED | S. JOHNSON | DATE 07/31/18 |

MARLIN TECHNOLOGIES INC.

TITLE  
OUTLINE, 505200  
CONFIGURABLE 12 POS KYPD

| SIZE               | DRAWING NUMBER | TYPE  | REV    |
|--------------------|----------------|-------|--------|
| B                  | 011701         | O     | C      |
| DRAWN G. ENGLEHART | DATE 01/26/16  | SHEET | 1 OF 1 |