

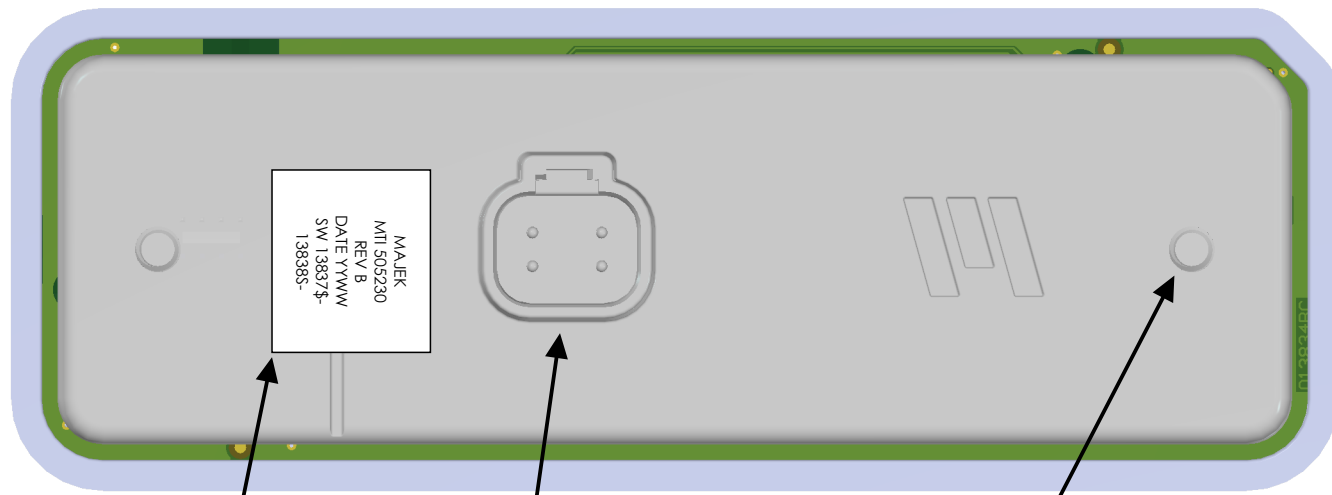


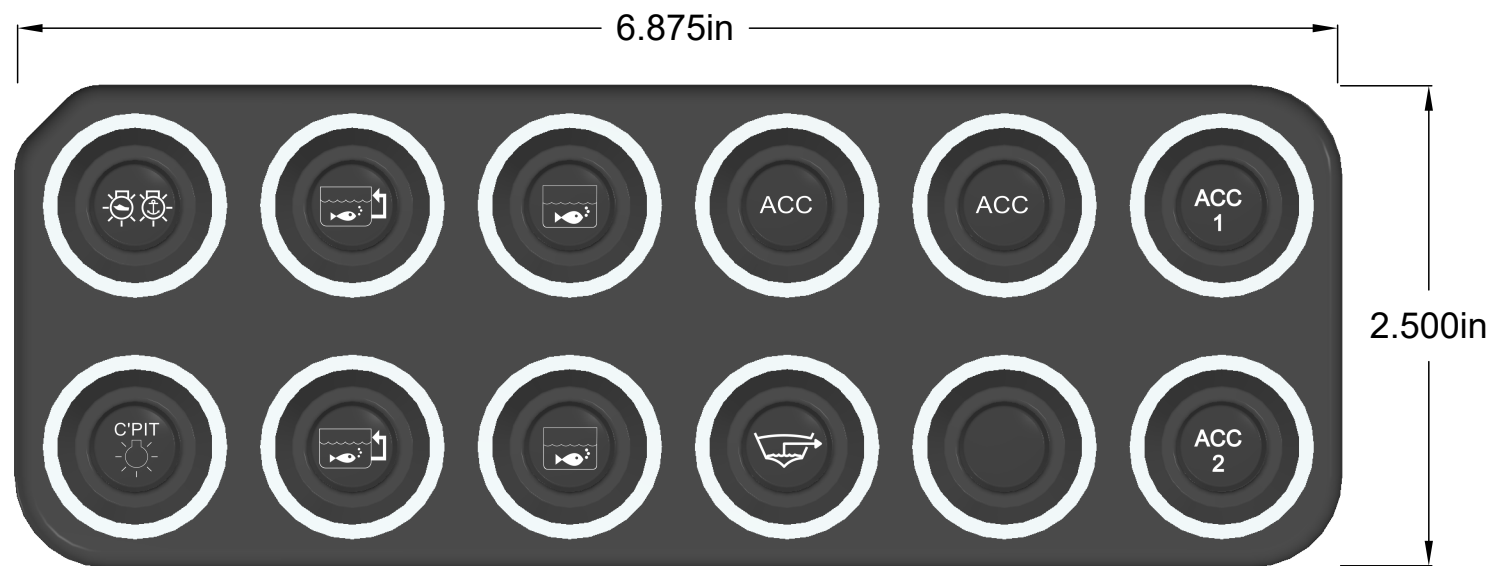

MAJEK
MTI 505230
REV B
DATE YYWW
SW 13837\$-
13838S-


J1
DEUTSCH DT15-4P
MATES WITH
DEUTSCH DT06-4S

M6 x 1mm STUD (2PLCS)
MAX. TORQUE = 35 IN LBS.

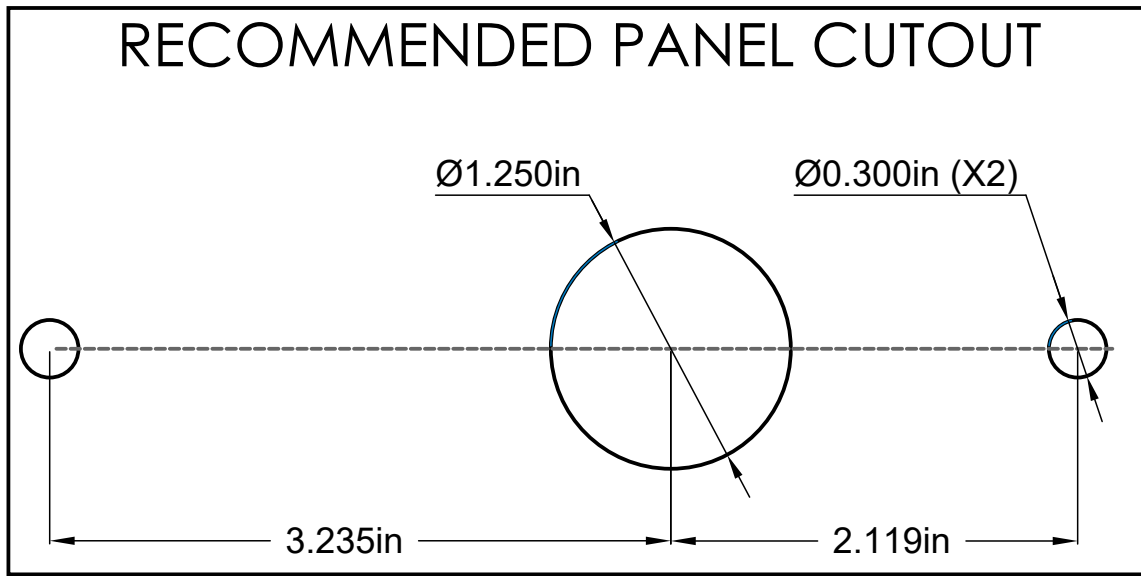

REVISIONS				
REV	DATE	ECN	DESCRIPTION	APVD
A	10/04/21	13829E	RELEASE TO PRODUCTION	JC
B	01/16/25	18239E	BACKPLATE MATERIAL CHANGE TO NORYL	JC

505230

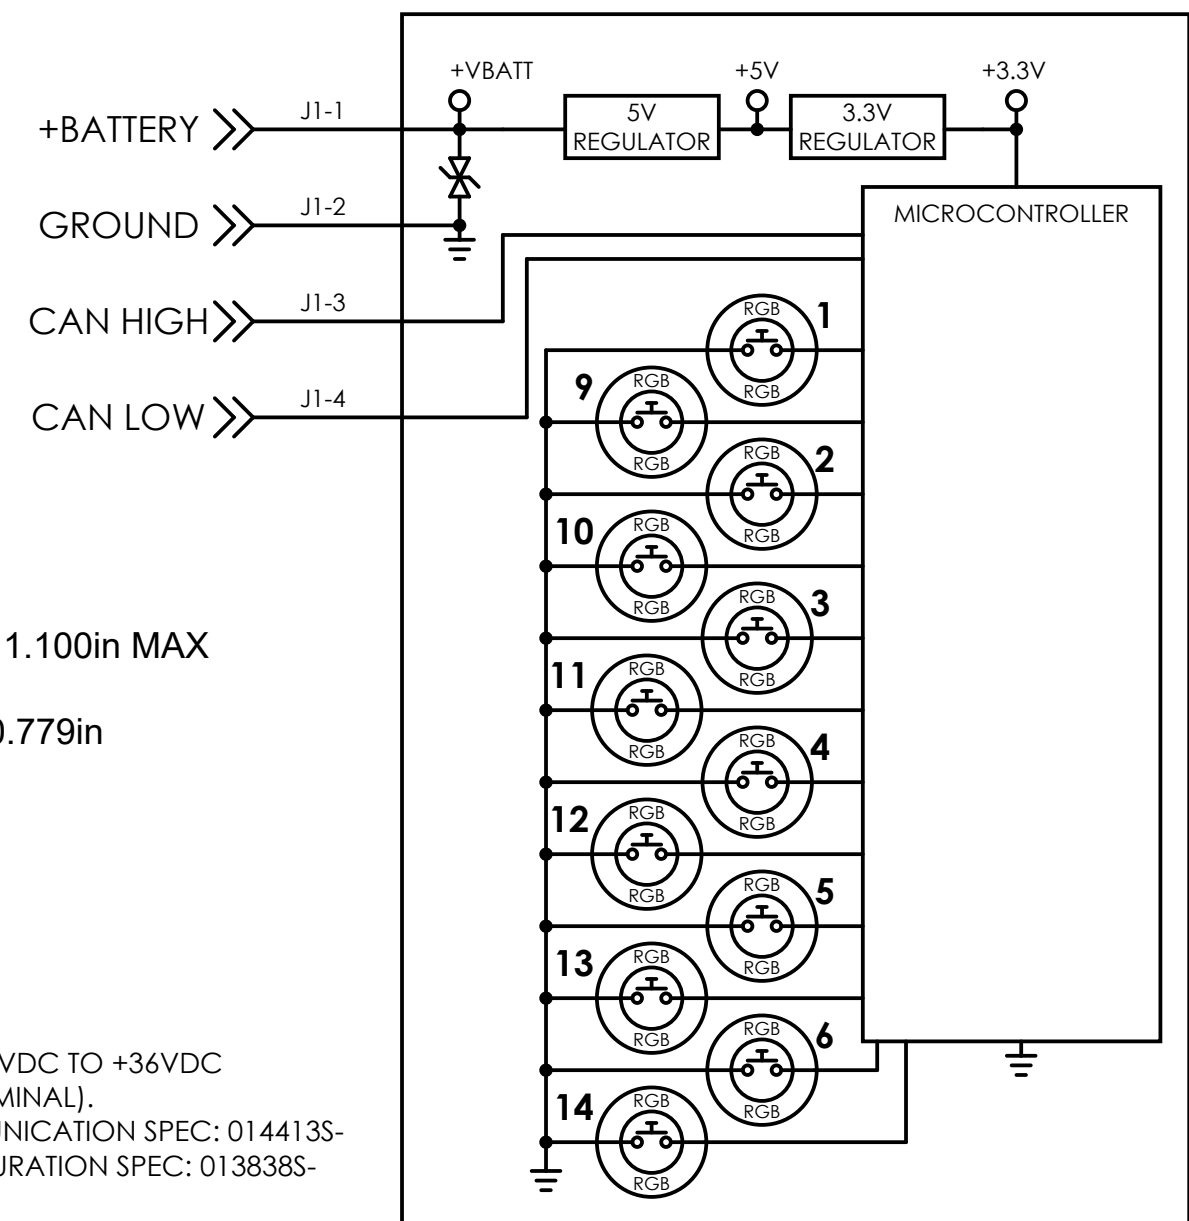

- NOTES:
1. OPERATING VOLTAGE: +9VDC TO +36VDC (+12VDC OR +24VDC NOMINAL).
 2. REFERENCE CAN COMMUNICATION SPEC: 014413S-
 3. REFERENCE XML CONFIGURATION SPEC: 013838S-

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE		
TWO PLACE DECIMAL +/- 0.05	THREE PLACE DECIMAL +/- 0.015	ANGLES N/A
CHECKED BY: J. COOPER	DATE: 10/26/23	
APPROVED BY: J. COOPER	DATE: 10/26/23	

TITLE: **OUTLINE, 505230
MAJEK 12PB KEYPAD**

SIZE: B	DRAWING NUMBER: 013831	TYPE: O	REVISION: B
DRAWN BY: E. FIERST	DATE: 10/20/23	SHEET 1	OF 1