MARLIN TECHNOLOGIES

M-FLEX 2X2 CAN SPLITTER

The 2x2 CAN Splitter is engineered to deliver robust and efficient data for OEM systems. Designed with four four-pin Deutsch connectors, this assembly simplifies CAN communication while simultaneously providing power and ground connections in a compact, reliable package.



M-Flex CONTROLLERS

IP67

12V 24V

RoHS Compliant







FEATURES

- Four four-pin Deutsch DT style connectors.
- Fast and reliable CAN messaging.
- Delivers voltage and ground connection.


M-Flex CONTROLLERS

SPECIFICATIONS

Specifications subject to change without notice. \ Revised 10.26

Supply Voltage	12V
Max Current	Power and Ground Circuits rated to 13A, CANH and CANL Circuits 1A
Connectors	Deutsch DT15-4P or equivalent
Ingress Protection	IP67
Operating Temperature	-40° to 85°C (-40° to 185°F)
Storage Temperature	-40° to 85°C (-40° to 185°F)
Dimensions	3.05 in L x 2.10 in W x 1.19 in D (77.47 mm L x 53.34 mm B x 30.23 mm H)

DIMENSIONS

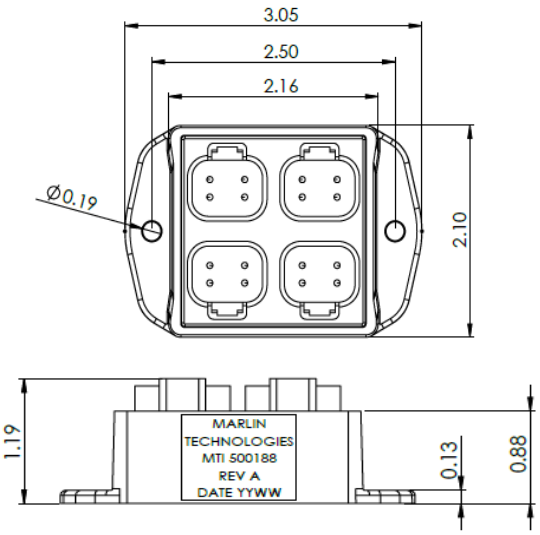

MARLIN TECHNOLOGIES

For a detailed specification visit marlintech.com

Marlin Technologies, Inc.
101 Industrial Drive
Horicon, WI 53032-1803
920.485.4463 | P

MARLINTECH.COM

MADE IN THE USA WITH IMPORTED MATERIALS