

# LEGEND SERIES 6PB KEYPAD

The M-Flex Legend Series Keypads have relegendable keycaps and are designed for severe duty, outdoor mobile applications and built to withstand the harsh temperatures, shock and vibration, moisture and electrical transients that are common to these environments.



**M-Flex**  
 KEYPADS

 12V  
24V

IP67


 RoHS  
compliant


## FEATURES



Relegendable keycaps.  
Standard and custom icons.




Tactile Buttons with actuation  
feedback.



CAN protocol J1939,  
CANopen, NMEA 2000.



Four RGB LED indicators for  
brighter illumination and full  
color control.



Vertical or horizontal mount.



On/off, momentary, toggle scroll/  
step functions for each key.



Deutsch DT style connectors.



Compatible with Marlin Digital  
Switchers and IO Controllers.




Optional Bluetooth connectivity.

## SPECIFICATIONS

Specifications subject to change without notice. \ Revised 07.23

<b>Supply Voltage</b>	9 – 32VDC.
<b>Max Current</b>	1A @ 12VDC.
<b>CAN Protocol</b>	J1939, CANopen, NMEA 2000.
<b>Baud Rate</b>	250, 500, 1000 kbps.
<b>Switch Backlighting</b>	Dimmable color LED backlighting on switches; intensity controlled via CAN message.
<b>Actuation</b>	Snap dome contacts operate at 340 grams of force.
<b>Connector</b>	Deutsch DT04-4P.
<b>Mounting</b>	(2) #10-32 bolt; 35 in. lbs torque.
<b>Ingress Protection</b>	IP67.
<b>Operating Temperature</b>	-40° to 85°C (-40° to 185°F).
<b>Storage Temperature</b>	-40° to 85°C (-40° to 185°F).
<b>Enclosure</b>	PC PBT alloy plastic resin.

## DIMENSIONS

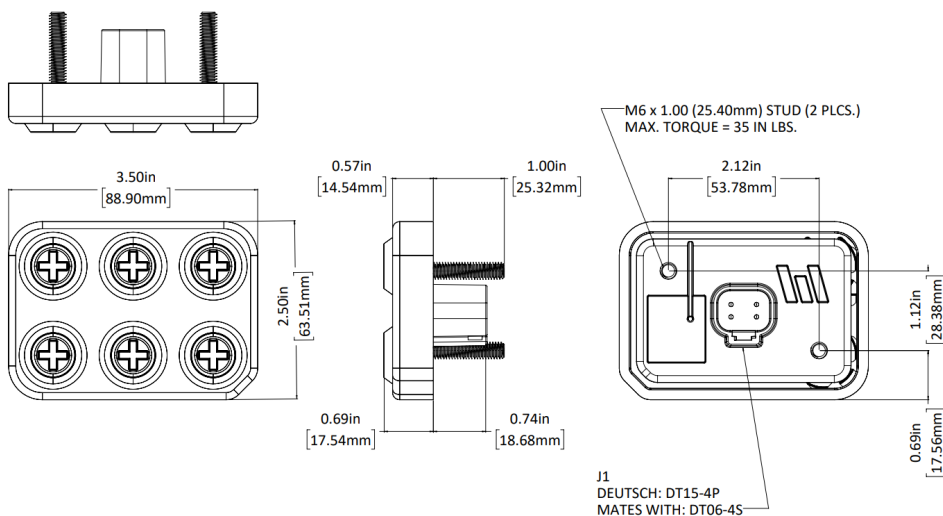

For a detailed specification visit  
[marlintech.com/m-flex](http://marlintech.com/m-flex)

Marlin Technologies, Inc.  
101 Industrial Drive \ P.O. Box 123  
Horicon, WI 53032-1803  
920.485.4463 \ P  
920.485.2899 \ F

**MARLINTECH.COM**  
PROUDLY MADE IN THE USA